
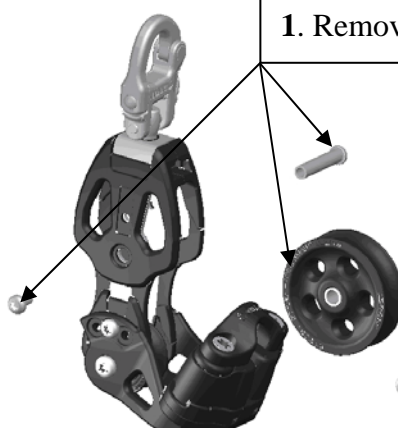


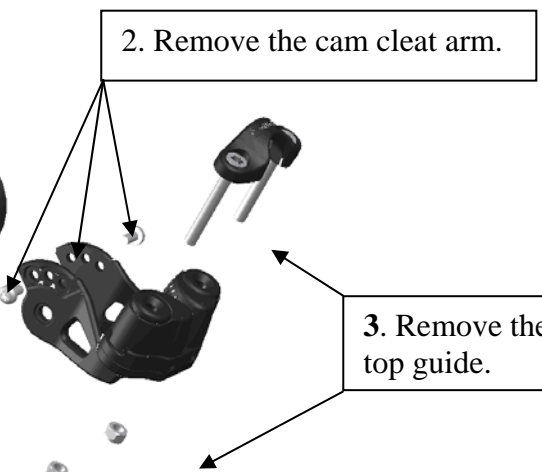


Assembly of endless line in Twin-cam fiddle block

405-001-40/406-001-40

Note! Small loose parts

Tools needed: Torx keys T20 and T25

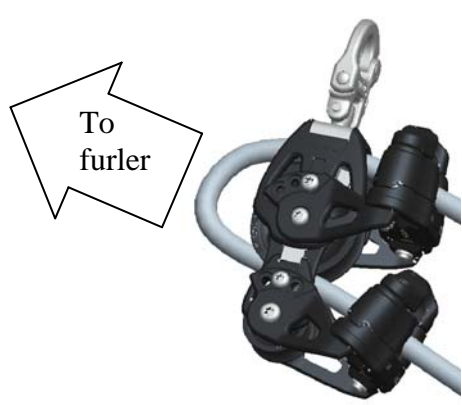 <p>1. Remove the larger sheave.</p>	 <p>2. Remove the cam cleat arm.</p> <p>3. Remove the top guide.</p>
 <p>4. Remove the top guide from the lower cam cleat.</p>	 <p>5. Fit the endless line.</p>
 <p>6. Assemble the parts in opposite order.</p> <p>To furler</p>	



www.seldenmast.com